

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com


Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

RoHS
 2002/95/EC
 2011/65/UE

rightly blue

tasker® C701 S.F/U.T.P. Cat. 5e 4x2x0,14mm² - UL/ETL verified Cable

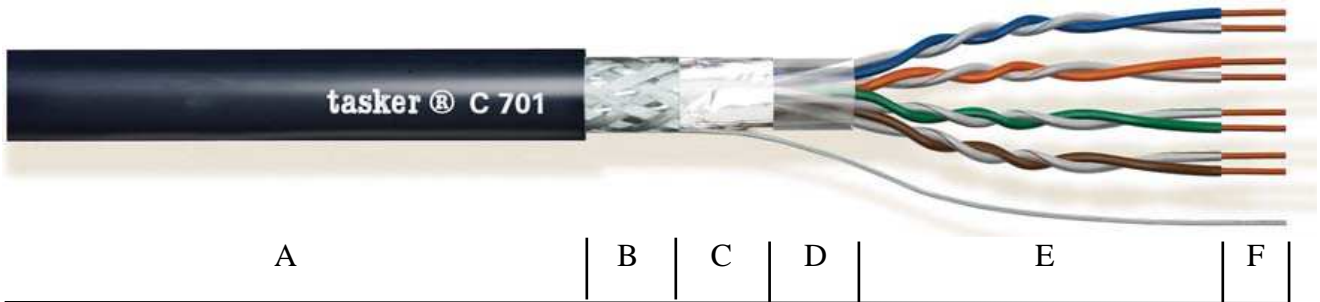

ETHERSOUND Stranded conductors EIA/TIA 568-suitable not only for RJ 45 8 Pin.
CATEGORY High Frequency Transmission Data (See Data Network Catalogue).
APPLICATION Digital Audio or data transmission.

- A:** Blue-Night soft **PVC** sheath. Outer Diam. Ø 7,00 (±0,20) mm.
- B:** First Shielding with a Braid of O.F.C. tinned copper covering 70% + Drain Wire.
- C:** Second shielding with Aluminum tape, covering 100%.
- D:** The four pairs are stranded together with polyester based tape.
- E:** Insulation with PE – Diameter Ø 0,90 mm - RJ45 connector compatible.
 Core colors: white-blue/Blue, white-Orange/Orange, white-green/Green, white-brown/Brown.
- F:** Stranded formation of 7x0,15 mm in O.F.C. Red Copper.
 Nom. Cross section 4x2x0,14 mm².

MARKING tasker® C701 E-TYPE CM 4x2x0,14 mm² 60°C (UL) E188630 CSA LL81295 FT4 ETL Verified TIA/EIA-568-B.2 Cat.5e PATCH CABLE S.-F.T.P.
CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	138 Ω/Km
Impedance	100 Ω
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			